


385-20/08/798115



FOR FILING A PATENT APPLICATION UNDER 37 CFR 1.60 PTO/SB/ 13 (10-92)

DOCUMENT NUMBER	ANTICIPATED CLASSIFICATION OF THIS APPLICATION		PRIOR APPLICATION EXAMINER	ART UNIT
	CLASS	SUBCLASS		
Para-1479	379		Matar	2601

Address to:  
 Commissioner of Patents and Trademarks  
 Washington, D.C. 20231

This is a request for filing a ☒ continuation ☐ divisional application under 37 CFR 1.60, of pending prior application Number 08/252,984, filed on 06/02/94 entitled Interactive Telephone System for Optimizing Service Economy

1. Enclosed is a copy of the latest inventor-signed prior application, including a copy of the oath or declaration showing the original signature or an indication it was signed. I hereby verify that the papers are a true copy of the latest signed prior application number 08/252,984 and further that all statements made herein of my own knowledge are true; and further that these statements were made with the knowledge that willful false statements and the like are made punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.14(c))		17 - 20 =		x \$ =	\$
INDEPENDENT CLAIMS (37 CFR 1.14(d))		3 - 3 =		x \$ =	
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.14(e))				+ \$ =	
				BASIC FEE (37 CFR 1.14(f))	+ =
				Total of above Calculations =	
				Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).	
				TOTAL =	\$385.00

2. ☒ A verified statement to establish small entity status under 37 CFR 1.9 and 1.27  
☐ is enclosed.  
☒ was filed in prior application number 07/873,323 and such status is still proper and desired (37 CFR 1.28(a)).
3. ☒ The Commissioner is hereby authorized to charge any fees which may be required under 37 CFR 1.16 and 1.17, or credit any overpayment to Deposit Account No. 02-4470. A duplicate copy of this sheet is enclosed.
4. ☒ A check in the amount of \$ 385.00 is enclosed.
5. ☐ Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
6. ☐ The inventor(s) of the invention being claimed in this application is (are):
7. ☐ This application is being filed by less than all the inventors named in the prior application. In accordance with 37 CFR 1.60(b), the Commissioner is requested to delete the name(s) of the following person or persons who are not inventors of the invention being claimed in this application:
8. ☒ Amend the specification by inserting before the first line the sentence: "This application is a ☒ continuation ☐ division of application number 08/252,984 filed 06/02/94, (status, abandoned, pending, etc.)."

PTO/SB/ 13 (10-92)

[Page 1 of 2]


Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

## (REQUEST FOR FILING A PATENT APPLICATION UNDER 37 CFR 1.60, PAGE 2)

9. ☐ New formal drawings are enclosed.
10. ☐ Priority of foreign application number \_\_\_\_\_, filed on \_\_\_\_\_ in \_\_\_\_\_ is claimed under 35 U.S.C. 119.  
☐ The certified copy has been filed in prior application number \_\_\_\_ / \_\_\_\_\_, filed \_\_\_\_\_.
11. ☐ A preliminary amendment is enclosed.
12. ☐ The prior application is assigned of record to Paraqon Services International, Inc.
13. ☒ Also enclosed: True Copy of Associate Power of Attorney in Serial No. 08/252,984
14. ☒ The power of attorney in the prior application is to: John P. Sutton  
 a. ☐ The power of attorney appears in the original papers in the prior application.  
 b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.  
 c. ☒ Address all future correspondence to: (May only be completed by applicant, or attorney or agent of record.)  
John P. Sutton  
425 California Street, Suite 900  
San Francisco, CA 94104 Tel: (415) 296-0800

Feb 11 1997

Date



Signature

John P. Sutton Reg. No. 22,430

Typed or printed name

- ☐ Inventor(s)  
☐ Assignee of complete interest  
☒ Attorney or agent of record  
☐ Filed under 37 CFR 1.34(a)  
 Registration number if acting under 37 CFR 1.34(a): \_\_\_\_\_

462120 SAT 36280



INTERACTIVE TELEPHONE SYSTEM FOR  
OPTIMIZING SERVICE ECONOMY

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to telephone switching systems in general and, more particularly, to telephone systems wherein interconnections between calling and called parties are performed under control of data processing or computer equipment.

10 The present invention is especially useful in conjunction with telephone interconnection systems which are intended for providing the most economical domestic and international telephone service to those who subscribe to the service by providing

15 apparatus and methods in a system organized for quickly and efficiently employing the most advantageous domestic and international tariff rates to user originated traffic.

20 Tariff rates for originating traffic often vary greatly. There is a need, therefore, to provide a service that will allow callers to take advantage of tariff rate differences to achieve the most economically advantageous cost for their respective domestic and international traffic.

25 Description of the Prior Art

Interexchange carriers (IXCs) are telecommunication carriers that provide what is commonly known as long distance, or interexchange, service between geographical areas called Local Access Transport

30 Areas (LATAs). It is understood LATAs were created by a United States Federal Court in an antitrust

case. The court limited local exchange companies (LECs) to providing telephone service only within LATAs (intraLATA service) and expressly forbid LECs to provide service between LATAs (interLATA service). Thus, IXCs receive originating traffic from the LEC in that LATA, carry the traffic to the terminating LATA, and deliver it to the LEC serving the terminating LATA.

A wide variety of sometimes user interactive arrangements for applying data processing equipment or computers to telephone line switching and control have developed. For instance, U.S. Patent 4,071,698 by Barger et al describes an arrangement for demonstrating and then selling products, such as audio recordings, by the use of a telephone system. It employs either a human operator or an automated program as alternative interfaces. Both procedures make use of an audio repeater wherein product demonstrations are stored.

Statistical acquisition and analysis using a telephone system is disclosed in U.S. Patent 4,792,968 by Katz. An example is in the obtaining of medical data from a selected group of people. A voice generator or a human operator prompts the called party to originate data by telephone instrument actuation. Yet another statistical data handling telephone system using audio units for prompting while utilizing multiple processors is shown in U.S. Patent 4,845,739 by Katz.

U.S. Patent 4,930,150 by Katz applies a processor to make available a multiplicity of formats for services such as public polls, lotteries, auctions, promotions, sales operations and games. The telephone terminal of the user operates a switch to select a format

with the processor testing to determine whether the request is proper. Katz et al in U.S. Patent 4,932,046 describes use of a database to simulate a call termination signal to prompt the caller to hang up their telephone at the end of a recorded message.

An arrangement for conference call interconnecting a plurality of parties is shown in U.S. Patents 4,939,773 and 4,987,590 by Katz. The system bridges all the telephones of an intended group with a voice generator for prompting. Authorization of the participants is verified.

Use of automatic audio response units in combination with telephone switching operations is shown in U.S. Patent 3,482,057 by Abbott et al. A more interactive functioning in conjunction with a telephone call relay system is described in U.S. Patent 4,975,945 by Carbullido. Remote user terminals communicate with an Audio Response Unit (ARU) or an attended terminal to acquire from the originating user certain identification and/or credit card information. A unique call reference number is assigned to the call and stored. If a need to relay the call exists, the caller is bridged to a terminal block for person to person audio communications.

The prior art has also recognized that it is possible to realize cost savings because of the telephone tariff differentials as between various geographic locations. For instance, calls originating from the United States are frequently less expensive than calls originating from another country.

Thus, a system was developed to take advantage of this tariff differential. In the prior art system, an input line is dedicated to a particular user.

That is, for each subscribing user there is a unique dedicated input line. When the user calls into the system on that line, typically allowing it to ring only once, the system employs an autodialer configuration to call the user who responds by entering the desired number. The system dials that number on another line and then bridges the user with it upon response by the called party.

The aforementioned system can likewise establish conference call patches, or the like, all at the local call tariff rates. Such a system is described in the January 9, 1992 New York Times article entitled Hot-Wiring Overseas Telephone Calls by Anthony Ramirez. It suffers the disadvantage of requiring input telephone trunks dedicated to specific users with one such trunk for each user. It also is limited in flexibility and adaptability by the autodialer hardware. Thus a need remains for a system that can function with a minimum number of dedicated telephone trunks, but is expandable with ease to accommodate large numbers of subscribers while likewise enjoying the ability to rapidly relocate the entire system to other geographic areas to take advantage of changing tariff structures.

#### SUMMARY OF THE INVENTION

This invention, in cooperation with a public telephone network, provides an automated call processing system that incorporates an audio response unit and computer in a system arrangement for enabling a subscriber to initiate telephone calls whose network identified point-of-origin is a physical site other than the physical location of the subscriber. This objective will, among other things, enable subscribers to effectively realize

the most economically advantageous use of differences between tariff rates.

Further, this invention enables subscribers to initiate calls through the public telephone network without concern of unauthorized disclosure of the network identification number assigned to that subscriber. This invention also makes it possible to collect, store and archive detailed information of calls originated by subscribers for the purpose of billing subscribers and assisting with subscriber call management.

The objectives and advantages of this invention are achieved by providing subscribers with one, or more, telephone numbers that are assigned to this service by the local exchange telephone company provider (hereinafter referred to as the LEC), or an inter-exchange carrier (hereinafter referred to as an IXC). When a subscriber uses an assigned telephone number to establish a call to this service, the system will identify the subscriber by using a personal computer or switch software program. The system returns to the subscriber with either ringing or a unique tone. When the subscriber hears the ringing or unique tone, the subscriber manually, or automatically, terminates the call by hanging up.

Termination of the subscriber originated call signals the system to seize an outbound circuit over which it output a number the subscriber has previously had entered into the system subscriber list database as that subscriber's "call-back" number. The subscriber answers the system call-back and is prompted to input the telephone number of the party the subscriber wishes to call (hereinafter referred to as "called party number").

Following input of the called party number, the system seizes a second outbound circuit, output pulses the called party number over the second outbound circuit and bridges the subscriber onto the second line. After the called party answers, the system continues to monitor the connection for a signal that the subscriber wishes to either terminate the session, or establish another connection to another called party.

Accordingly, the present invention includes a method of providing economical telephone service by employing the most advantageous tariff between an originator and a called party. A central location service center is established at which a call-back telephone number is provided for each subscribing call originator. A number is assigned for use for all calls that are placed by that originator. This assigned number is used to call the service center whereupon the originator is identified by the service center.

A signal is sent from the service center to the originator, thus indicating that the originator is identified whereupon the originator is instructed or prompted to terminate the call. Termination by the calling party is sensed at the service center followed by seizing of a first outbound circuit over which the service center outputs the call-back number for the identified originator. This operation reconnects the service center via a voice connection to the originator.

The originator is prompted to input the telephone number of the called party the originator intends to call. A second outbound circuit is seized at the service center whereupon the called party number is



outputted to this second outbound circuit. Finally, the originator is bridged to the second outbound circuit thus connecting the originator with the called party.

5 The process, or system apparatus, in accordance with this invention, is preferably contained at a central location or service center. Since it is essentially self-contained for its purpose and requires a minimal number of lines connecting it to an exchange,  
10 the present invention is adaptable for relatively easy relocation to interface with the most economic tariff rate location wherever that might physically present itself throughout the world.

15 The process and apparatus of this invention interactively establishes communication links between a calling party and one or more parties called by that calling party. It employs input and output connections to a telephone exchange that provides interface switching of the calling party with the central  
20 location. A signal is generated containing data uniquely identifying the originating station of the calling party which signal is placed on the input connection to the central location whenever the calling party places a call to that input connection  
25 from their station.

The central location stores the unique identifying data of one or more authorized calling party subscribers. A signal on the central station input connection attempting to establish communications  
30 between the exchange and the central location causes the system to compare the data of the identifying signal associated with the connection attempt with the contents in the data storage.

452759445-034297

In response to a favorable comparison, a call is originated from this central location to the calling party station. Signals are then received from the calling party station for identifying a called party station with which the calling party desires to establish a communication connection. That is, these calling party originated signals identify a third party station. The central location finally bridges a communication connection between the calling party station and the third party station.

Preferably, the present invention responds to a favorable identification comparison as mentioned above by returning an audible signal to the calling party. This indicates the favorable comparison result so that the calling party will know to terminate the call attempt so as to allow the central location to originate a call to the call originating station. Failure of the calling party to terminate the call attempt a predetermined period of time after the recognition signal is given or from the time of commencement of an attempt to establish a connection from the calling party station terminates further processing of the connection attempt at the central location.

Connection attempt termination, because of the time-out function or a failure to produce a favorable comparison, can trigger a process which results in temporarily establishing a communication connection with the calling party station for presenting an audio message thereto. The central location typically will disconnect from the calling station after completion of an audio message.

The present invention is particularly well suited for advantageously utilizing the calling party

identifying data in the form of the contemporary direct inward dial number produced by the exchange. Thus, the central location stores in a memory the direct inward dial number for each calling party authorized to utilize the system. Following a favorable comparison of the calling party number with a stored number, the system obtains the direct inward dial number from storage for placing that number on an output connection to the exchange.

5. A failure of the called party to answer the call attempt from the central location can result in provision of an indication to the calling party that they can select between terminating connection attempts or attempting to establish a connection with another third party. The invention can accommodate establishment of a multiple party conference call in response to calling parties instructions to the central location.

The system is likewise well suited for receiving and collecting management and billing information on calls established by the system. This enables a determination of the extent of use of the system by authorized and/or unauthorized calling parties. After establishing a communication connection with the calling party station, the central location can respond to a special signal originated from the calling party station so as to terminate further communication and communication attempts with the calling party station. This invention can utilize a dual tone multi-frequency signal as the above mentioned special signal from said calling party station.

The method and apparatus of this invention provides an economical telephone service by employing the

5 most advantageous tariff between an originator and one or more called parties. A service center is established at which a call-back telephone number is provided for each originator, and at which a number is assigned for use for all calls that are placed by that originator. The assigned number is used to call the service center whereupon the originator is identified by the service center.

10 A signal is sent from the service center to the originator thus indicating that the originator is identified whereupon the originator is instructed to terminate the call. Sensing originator call attempt termination, the service center responds by seizing a first outbound circuit over which the service  
15 center outputs the call-back number for the identified originator thereby reconnecting the service center to the originator.

20 The originator is prompted to input the telephone number of the called party the originator intends to call. A second outbound circuit is seized at the service center whereupon the called party number is outputted to the second outbound circuit. Bridging the originator to the second outbound circuit thus connects the originator with the called party.

25 Those having normal skill in the art will recognize the foregoing and other objects, features, advantages and applications of the present invention from the following more detailed description of the preferred embodiments as illustrated in the  
30 accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a generalized block diagram of a system organization in accordance with the present invention.

5      FIGURE 2 is a flow diagram of a component function of the system for determining the validity of a caller or subscriber attempt to dial into the system.

10      FIGURE 3 is a flow diagram of a component function of the system responsive to either an invalid caller attempt to dial into the system or failure of a valid user to terminate the call within a predetermined period of time.

15      FIGURE 4 is a flow diagram of a component function of the system response in the presence of a valid input from a user or subscriber including an automated outdial attempt.

20      FIGURE 5 is a flow diagram of a component function of a system attempt to establish a connection with a called party in response to a proper user input.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

25      A network identification number, commonly known as an Automatic Number Identification (ANI) and/or Calling Number Identification (CNI), are widely employed in the telephone industry. Such numbers are required by the public telephone network to rate, route and bill appropriate parties for completed telephone calls. Current technologies in the public telephone network makes it possible to  
30      disclose the calling party network identification

numbers to the called party during the ringing cycle of the called party telephone. The present invention advantageously utilizes (but does not require) disclosure of these identification numbers to the called party.

5

Accordingly, the present invention advantageously utilizes the Direct Inward Dial (DID) numbers. Under LEC tariffs it is possible to lease a block, or group, of telephone numbers. The size of the groups may vary between LECs, but a group of one hundred numbers is often a typical group. When these numbers are sequential, they are commonly referred to as blocks, but groups of random numbers are also used.

10

For purposes of this invention, sequential numbering is not required. The customer leasing the numbers from an exchange does not have to lease a corresponding terminating circuit for each number in the group in order to place a call to each number. Instead, the customer leases local facilities in quantities the customer feels are adequate to handle traffic from the leased numbers. When a caller dials one of the numbers in the group, the central office of the terminating LEC (the LEC that assigned the numbers) will complete the call over any of the leased local facilities that are available and also pass the last four, sometimes five, numbers that the calling party dialed. The numbers that are passed are called the Direct Inward Dial, or DID, numbers.

15

20

25

30

If a calling party (in the case of this invention, a "subscriber") is given one of the assigned numbers to dial to reach the system, the system can identify that subscriber because it will receive the last four, or five, numbers of the number the subscriber

dialed. It is thereafter a relatively conventional software process to determine call validity by matching the DID numbers against a subscriber list.

5 While a detailed illustrative description of a preferred embodiment of this invention is provided herein, those having normal skill in the art will recognize that there are a wide variety of physical communications systems, data formats and operating structures, available to implement this invention.  
10 Some of those alternatives may comprise structures and processes quite different from those of the disclosed description. Consequently, the specific structural and functional details disclosed herein are merely representative, yet in that regard they  
15 are deemed to afford the best description for purposes of disclosure of an enabling preferred embodiment and to provide a basis for understanding the spirit of this invention.

20 A block diagram of the system environment of this invention is presented in FIG. 1. A user or subscriber is represented as connected to the system via a telephone handset at station 10. The user initiates the system operation by placing a call through the domestic and/or international public  
25 telephone network (IXC) 14 using one of a number of telephone numbers assigned to the service center master system 12 by local exchange company (LEC) 15.

30 LEC 15 directs the call over incoming direct inward dial (hereinafter referred to as DID) circuits 16 to a call response unit (CRU) 20. CRU 20 includes a computer, controller, or other suitable data processing unit along with appropriate sensing circuit connections as is conventional for data acquisition and control technology. CRU 20 will

attempt to identify the caller by collecting the DID numbers passed to the system by the LEC 15, and deliver those digits to the subscriber table server 21, which contains the database that identifies subscribers by matching DID numbers against a list of call-back numbers provided by subscribers.

More particularly, CRU 20 is a computer, or switch, that is connected to the LEC 15 central office and consisting of integrated components that permit the system to perform a number of functions integral to this invention. This includes switching functions to handle line (circuit) connections; interactive voice response operations; database controller for subscriber identification; and a system message detail recording (SMDR) unit 24 to provide information necessary to create call records.

Callers are also identifiable via IXC 14 generated DTMF signals that are passed to the system. DTMF means Dual Tone Multifrequency. These are signaling tones used by customer premises equipment and LEC central offices to signal each other. A common use of DTMF by customer premises equipment is to pass to the central office the telephone number to which the calling party wishes to establish a connection.

If the caller reaches CRU 20 by calling an "800" number assigned to the system, CRU 20 will attempt to identify the caller by prompting the caller to enter, via DTMF, a personal identification number (PIN) unique to that subscriber. The PIN is then delivered to the subscriber table server 21 for comparison against the subscriber list of call-back numbers. It is important to note that, while the use of DID numbers is one of the most practicable means of obtaining subscriber recognition at this



time, this invention is not limited to DID identification of subscribers.

As further technological services and features of the public network are introduced, particularly those services and features relying upon Signalling System 7 technology, this invention may achieve subscriber recognition through a variety of means, such as, but not limited to, calling number identification, automatic number identification and other technologies that permit recognition of the calling party as offered by LECs, IXCs and other telecommunications carriers.

At the same time the CRU 20 delivers the DID digits to the subscriber table server 21, it also delivers call detail information to the system message detail recording database (SMDR) 24. The call detail information includes information relative to all events relating to the setup and completion of telephone calls to and from this invention.

CRU 20 responds to the incoming call signal by generating either a traditional ring-back signal, or a nonstandard sound (music, or some tone other than the normal ring-back signal). As a condition of the service, upon hearing the ring-back or nonstandard tone, the subscriber hangs up (goes on-hook).

When the subscriber table server 21 matches the DID digits with a subscriber call-back number, CRU 20 seizes one of the outbound circuits 25 from the group of such circuits that are connected directly to an IXC 14. The call-back number is then outpulsed by the DTMF recognition and dialing unit (hereinafter referred to as the DTMF generator) 26. When the subscriber answers (goes off-hook), CRU 20

activates voice responder unit 28 which prompts the subscriber to enter, via DTMF, a called party number.

When the subscriber enters a called party number,  
5 CRU 20 seizes a second outbound circuit 25. DTMF  
Generator 26 recognizes the called party number DTMF  
digits entered by the subscriber and output pulses those  
digits over the second seized circuit. DTMF  
10 generator 26 activates bridging function 29 to  
bridge the subscriber onto the second outbound  
circuit. DTMF recognition and dialing unit 26 also  
monitors call progress tones; e.g., ringing, busy,  
off-hook (answer).

At all times, including after the called party has  
15 answered, CRU 20 continues to monitor the seized  
circuits 25 for a prearranged DTMF sequence that the  
DTMF Generator 26 will recognize as a signal from  
the subscriber indicating an intention to terminate  
the call in progress and possibly to initiate  
20 another call. Upon receiving the prearranged DTMF  
sequence, CRU 20 disconnects from the outbound  
circuit 25 connecting the called party to the  
system. The voice response unit 28, or some other  
audio signal, prompts the subscriber to input  
25 another called party number.

In the illustrative system example of FIG. 1, a  
series of operating processes are executed, as  
illustrated in the general flow diagrams of FIGS. 2  
through 4, as described in detail below.

30 FIG. 2 illustrates the operating process associated  
with determining that a caller initial attempt is  
valid or invalid. This process is initiated at 35  
when a caller dials one of the telephone numbers

assigned to the system 12. CRU 20 receives the incoming call signal at 36 and the DID numbers at input 16 from the LEC 15, and responds at 37 with either a traditional ring-back signal, or non-standard sound. By not going off-hook, the terminating central office for LEC 15 will not return answer supervision to the originating end of the circuit. Answer supervision is a signaling process by which the terminating LEC central office signals to the originating LEC central office that the called number has gone off-hook (answered) and timing should commence for billing purposes.

At the same time, CRU 20 delivers the DID numbers to the subscriber table server 21 at 38, which is followed by an attempt at 39 to match the DID digits with a subscriber call-back number stored in the database of subscriber table server 21. A favorable match results at 42 in the sending of the subscriber telephone number to the subscriber call processing unit (not shown). Upon hearing the ring-back, or nonstandard tone, caller 10 terminates the call to CRU 20 by hanging up (go on-hook) within a predetermined time at 40.

When the caller hangs up concurrent with a valid DID match 39, the valid caller indial attempt is completed at 41. Note that the invalid call procedure of FIG. 3 is invoked at 44 if either a match of a valid DID number stored in the server 21 database is not produced or a failure is detected at 40 that the caller 10 has not terminated the call within a predetermined time period. The time period for subscribers to terminate the connection to CRU 20 upon hearing the ring-back, or unique tone, is predetermined. Typically suitable such time periods

considered acceptable for this invention can vary between five and fifteen seconds.

FIG. 3 illustrates the process in response to failure conditions. The first response at 45 is to the fact that calling party 10 failed to hang up (go on-hook) within a predetermined time. This is treated as initiation of an invalid caller indial attempt. When the predetermined time for calling party 10 to hang up elapses without a disconnect by caller 10, CRU 20 at 48 goes off-hook and sends answer supervision to the originating central office. When answer supervision is received at the originating central office, call completion takes place and timing of the call begins..

CRU 20 has the capability to send a voice message to the caller during an invalid caller indial attempt stating that service reached by the calling party is for subscribers only, as shown at 50. The message could also include a telephone number the calling party can call to initiate service if he, or she, desires. This message is sometimes hereinafter referred to as the "subscriber only message". After delivering the message, CRU 20 terminates the call by going on-hook at 51.

FIG. 3 also illustrates at 46 the response to an invalid caller indial attempt indication that is created when the subscriber table server fails to match the DID digits received with a valid subscriber call-back number. CRU 20 indicates to the SMDR software at 49 that the invalid caller indial attempt did occur.

Note that it is assumed for purposes of this invention that the failure of the calling party to

terminate the call within the predetermined time limit means that the calling party is not a subscriber to the service provided by this invention. The call initiation into the central location 12 is thus deemed coincidental or perhaps even unauthorized.

FIG. 4 illustrates the operating process in response to a subscriber outdial attempt. When the FIG. 2 process results in a decision that a valid subscriber indial attempt has occurred at 41, this produces initializing input 54 in FIG. 4. The subscriber table server (21) matches the DID digits with a valid subscriber call-back number at 55. CRU 20 next seizes one outbound circuit 56, and initiates DTMF outdial of the subscriber call-back number over the seized outbound circuit at 57.

When the subscriber answers, CRU 20 will recognize the subscriber off-hook at 58, and prompt the subscriber at 59 to enter, via DTMF, a called party number. If decision 60 recognizes subscriber input of a called party number, CRU 20 seizes a second outbound circuit 62, and initiates a called party attempt 63. The steps associated with the called party attempt operating process are illustrated in FIG. 5, and described in detail below.

Decision 58 also recognizes whenever, after outdialing the subscriber call-back number, CRU 20 has not received an off-hook within a predetermined time. This results in CRU 20 terminating the call (66) and an incomplete subscriber outdial attempt is sent at 65 for recording in the SMDR database.

FIG. 5 illustrates the steps associated with a called party attempt operating process. When a

second outbound circuit is seized, as described at 62 in FIG. 4, CRU 20 output pulses the called party number at 70, and bridges the subscriber onto the second outbound circuit to monitor call progress tones at 71. The called party answering or going off-hook within a predetermined time causes decision 72 to recognize that the called party attempt process is complete, and the CRU will continue to monitor the circuit 73.

10        Conversely, if CRU 20 decision 72 has not received an off-hook signal from the called party within a predetermined time 75, CRU 20 will time out and the call is terminated at 76. Also, if decision 78 notes that the subscriber terminated the connection by going on-hook (hanging up) before the called party answers, the called party attempt is terminated at 79, and an incomplete called party attempt is recorded in the SMDR data at 80.

20        Finally, if the subscriber inputs a prearranged DTMF sequence at 81, either prior to the called party answering or at anytime after the called party attempt is completed but before a disconnect signal is received, decision 81 terminates the called party attempt in progress, and CRU 20 will prompt the subscriber to input another called party number at 82. When decision block 82 recognizes presence of a subscriber input of another called party number, another called party attempt is initiated as CRU 20 output pulses the new called party number at 70.

30        A call is terminated 76, the call session ended 83 with call information sent to the SMDR software, and a call record created 84 under the following two conditions: First, if the CRU times out at 75, either because it does not receive a called party

number within a predetermined time after prompting  
the subscriber to enter such a number 86, or because  
it does not receive an off-hook from a called party  
within a predetermined time 72; and second, if at  
5 any time CRU 20 receives a disconnect signal from  
either the subscriber or the called party end of the  
circuit 85.

While the exemplary preferred embodiment of the  
present invention are described herein with particu-  
10 larity, those having normal skill in the art will  
recognize various changes, modifications, additions  
and applications other than those specifically  
mentioned herein without departing from the spirit  
of this invention.

15 What is claimed is:

00798445-034297  
262420-51786/80

## CLAIMS

1. A system at a central location for  
interactively establishing communication links  
between a calling party and one or more parties  
called by said calling party using input and output  
5 connections to a telephone exchange interconnecting  
the calling party with the central location wherein  
a signal containing data uniquely identifying the  
originating station of the calling party is placed  
on the input connection whenever the calling party  
10 places a call to said input connection from said  
station comprising:

means storing the unique identifying data of  
the calling party,

means responsive to a signal on said input  
15 connection indicating an attempt to establish  
communications between the exchange and the central  
location for comparing the data of the identifying  
signal associated with the connection attempt with  
the contents of said storing means,

20 means operable in response to a favorable  
comparison between said input data and said stored  
data for originating a call from said central  
location to said calling party station,

means responsive to signals received from said  
25 calling party station for establishing a communica-  
tion connection with a third party station  
identified by said received signals, and

means for bridging a communication connection  
between said calling party station and said third-  
30 party station.



2. A system in accordance with claim 1 which includes means operable after a predetermined period of time from commencement of an attempt to establish a connection from said calling party station for terminating said connection attempt.

3. A system in accordance with claim 2 wherein said connection attempt terminating means includes means for temporarily establishing a communication connection with said calling party station for presenting an audio message thereto, and means for disconnecting said central location and said calling station after completion of said audio message.

4. A system in accordance with claim 1 wherein said means operable in response to a favorable comparison includes means for returning an audible signal to the calling party indicative of said favorable comparison, whereby the calling party terminates the call attempt for allowing said central location to originate a call thereto.

5. A system in accordance with claim 4 wherein the calling party identifying data is the direct inward dial number produced by the exchange, said storing means containing the direct inward dial number for each calling party authorized to utilize said system, and said favorable comparison responsive means obtains the direct inward dial number from said storing means upon occurrence of said favorable comparison for placing said number on a said output connection to said exchange.

6. A system in accordance with claim 1 which includes means for receiving information on calls established by the system for enabling a determination of the extent of use of said system by said  
5 calling parties.

7. A system in accordance with claim 1 which includes means responsive to failure of the called party to answer the call attempt for providing an indication to the calling party that they can select  
5 between terminating connection attempts and attempting to establish a connection with another third party.

8. A system in accordance with claim 1 which includes means operable after establishing a communication connection with the calling party station for responding to a special signal  
5 originated from the calling party station so as to terminate further communications and communication attempts with said calling party station.

9. A system in accordance with claim 8 wherein said special signal responding means includes means for recognizing a dual tone multi-frequency signal from said calling party station.

0379844-03429  
462120-51136780

10. A method for interactively controlling communication links between a calling party and one or more parties called by said calling party through a telephone exchange wherein a signal containing data uniquely identifying the originating station of the calling party is transmitted by said exchange whenever said originating station places a call into said exchange comprising the steps of

5 establishing telephone line input and output connections from a central location to said telephone exchange,

10 storing the unique identifying data of the calling party at said central location,

15 comparing the data of the identifying signal associated with a connection attempt with the said stored data in response to a signal on a said input connection attempting to establish communications between said exchange and said central location,

20 responding to a favorable comparison between said input data and said stored data for originating a call from said central location to said calling party station,

25 receiving signals from said calling party station for establishing a communication connection with a third party station identified by said received signals, and

bridging a communication connection between said calling party station and said third party station.

11. The method in accordance with claim 10 which includes the step of completing a connection to the said input line for placing an audio message thereon whenever said comparison step fails to produce a  
5 favorable result.

12. The method in accordance with claim 11 which includes the step of enabling said connection completing and audio message placing step whenever the calling party fails to terminate the call  
5 attempt after passage of a predetermined period of time.

13. The method in accordance with claim 10 wherein each calling party station has a unique direct inward dial number assigned thereto and said exchange produces said direct inward dial number in  
5 conjunction with attempts to establish a connection with said central location, said storing step including the step of storing a plurality of direct inward dial numbers each representing an authorized subscriber of said central location, said step of  
10 originating a call to said calling party including the step of retrieving the stored said direct inward dial number assigned to that calling party.

14. A method providing economical telephone service by employing the most advantageous tariff between an originator and one or more called parties, comprising the steps of

5 providing a service center at which a call-back telephone number is provided for each originator and at which a number is assigned for use for all calls that are placed by that originator,

10 using the assigned number to call the service center whereupon the originator is identified by the service center,

15 sending a signal from the service center to the originator thus indicating that the originator is identified whereupon the originator is instructed to terminate the call,

20 sensing originator call attempt termination at the service center and responding thereto by seizing a first outbound circuit over which the service center outputs the call-back number for the identified originator thereby reconnecting the service center to the originator,

prompting the originator to input the telephone number of the called party the originator intends to call,

25 seizing a second outbound circuit at the service center whereupon the called party number is outputted to the second outbound circuit, and

30 bridging the originator to the second outbound circuit thus connecting the originator with the called party.

15. The method in accordance with claim 14 which includes the step of connecting the outbound connections of said service center with a telephone exchange having an economical tariff rate.

16. The method in accordance with claim 15 which includes the step of determining that the originator has failed to terminate the call attempt a predetermined time after said prompting step.

17. The method in accordance with claim 16 which includes the step of responding to a failure to determine that the originator is authorized to establish communications by completing the  
5 connection to the originator input line to the central location and presenting an audio message on said line announcing to the originator that the call placement is not authorized.

03793145 031297  
252120 51135230

INTERACTIVE TELEPHONE SYSTEM FOR  
OPTIMIZING SERVICE ECONOMY

ABSTRACT OF THE DISCLOSURE

5 A central location of a telephone switching system  
is placed where favorable local exchange tariffs are  
available. The central location includes a caller  
responsive unit which compares the caller identifi-  
cation accompanying the call attempt against a  
10 prestored list of identification data assigned to  
authorized system users. A positive comparison  
result causes the system to signal to the originator  
to terminate the call attempt. The system  
thereafter calls the originating caller telephone  
from the central location. The system allows the  
15 originating caller to input the number of the party  
to whom a connection is desired by the originator.  
The system responds by establishing a connection  
with the called party and bridges communications  
between the called and calling parties at the  
20 central location. The system includes the  
capability of employing audio responses of various  
types to calling or called parties.

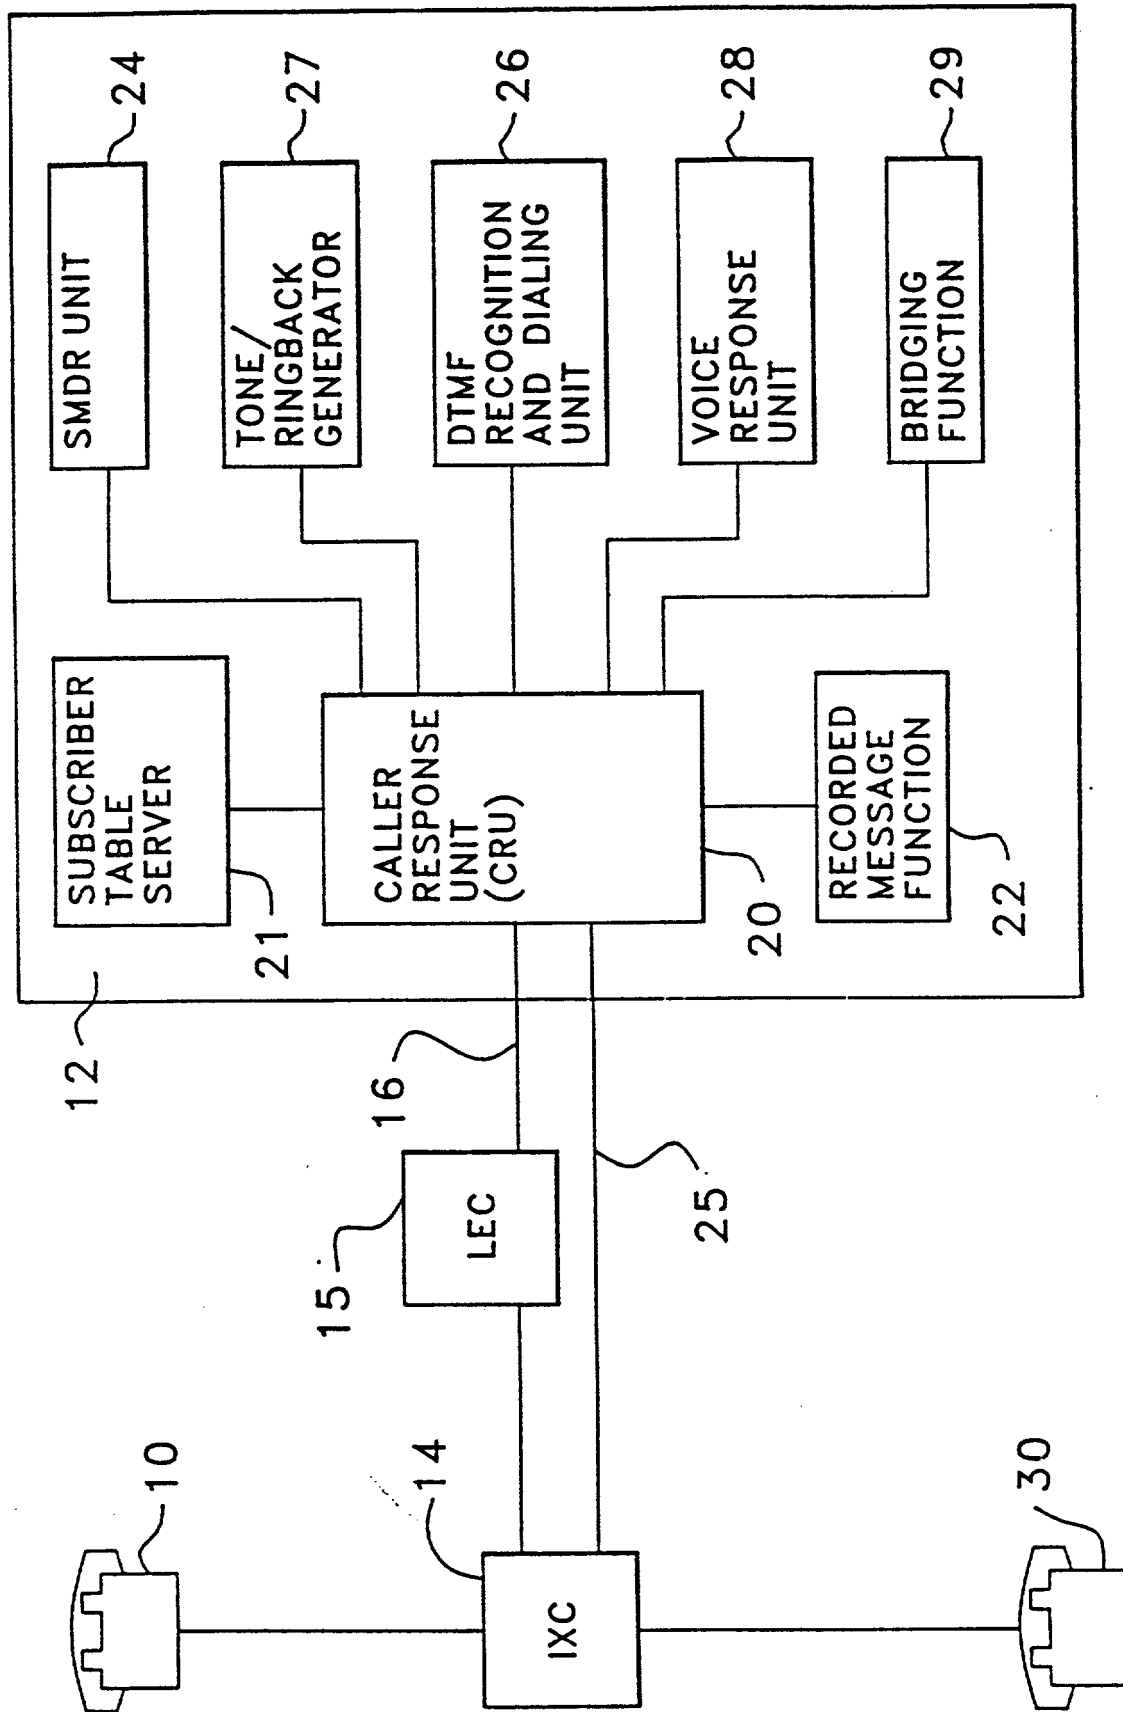


FIG. 1.



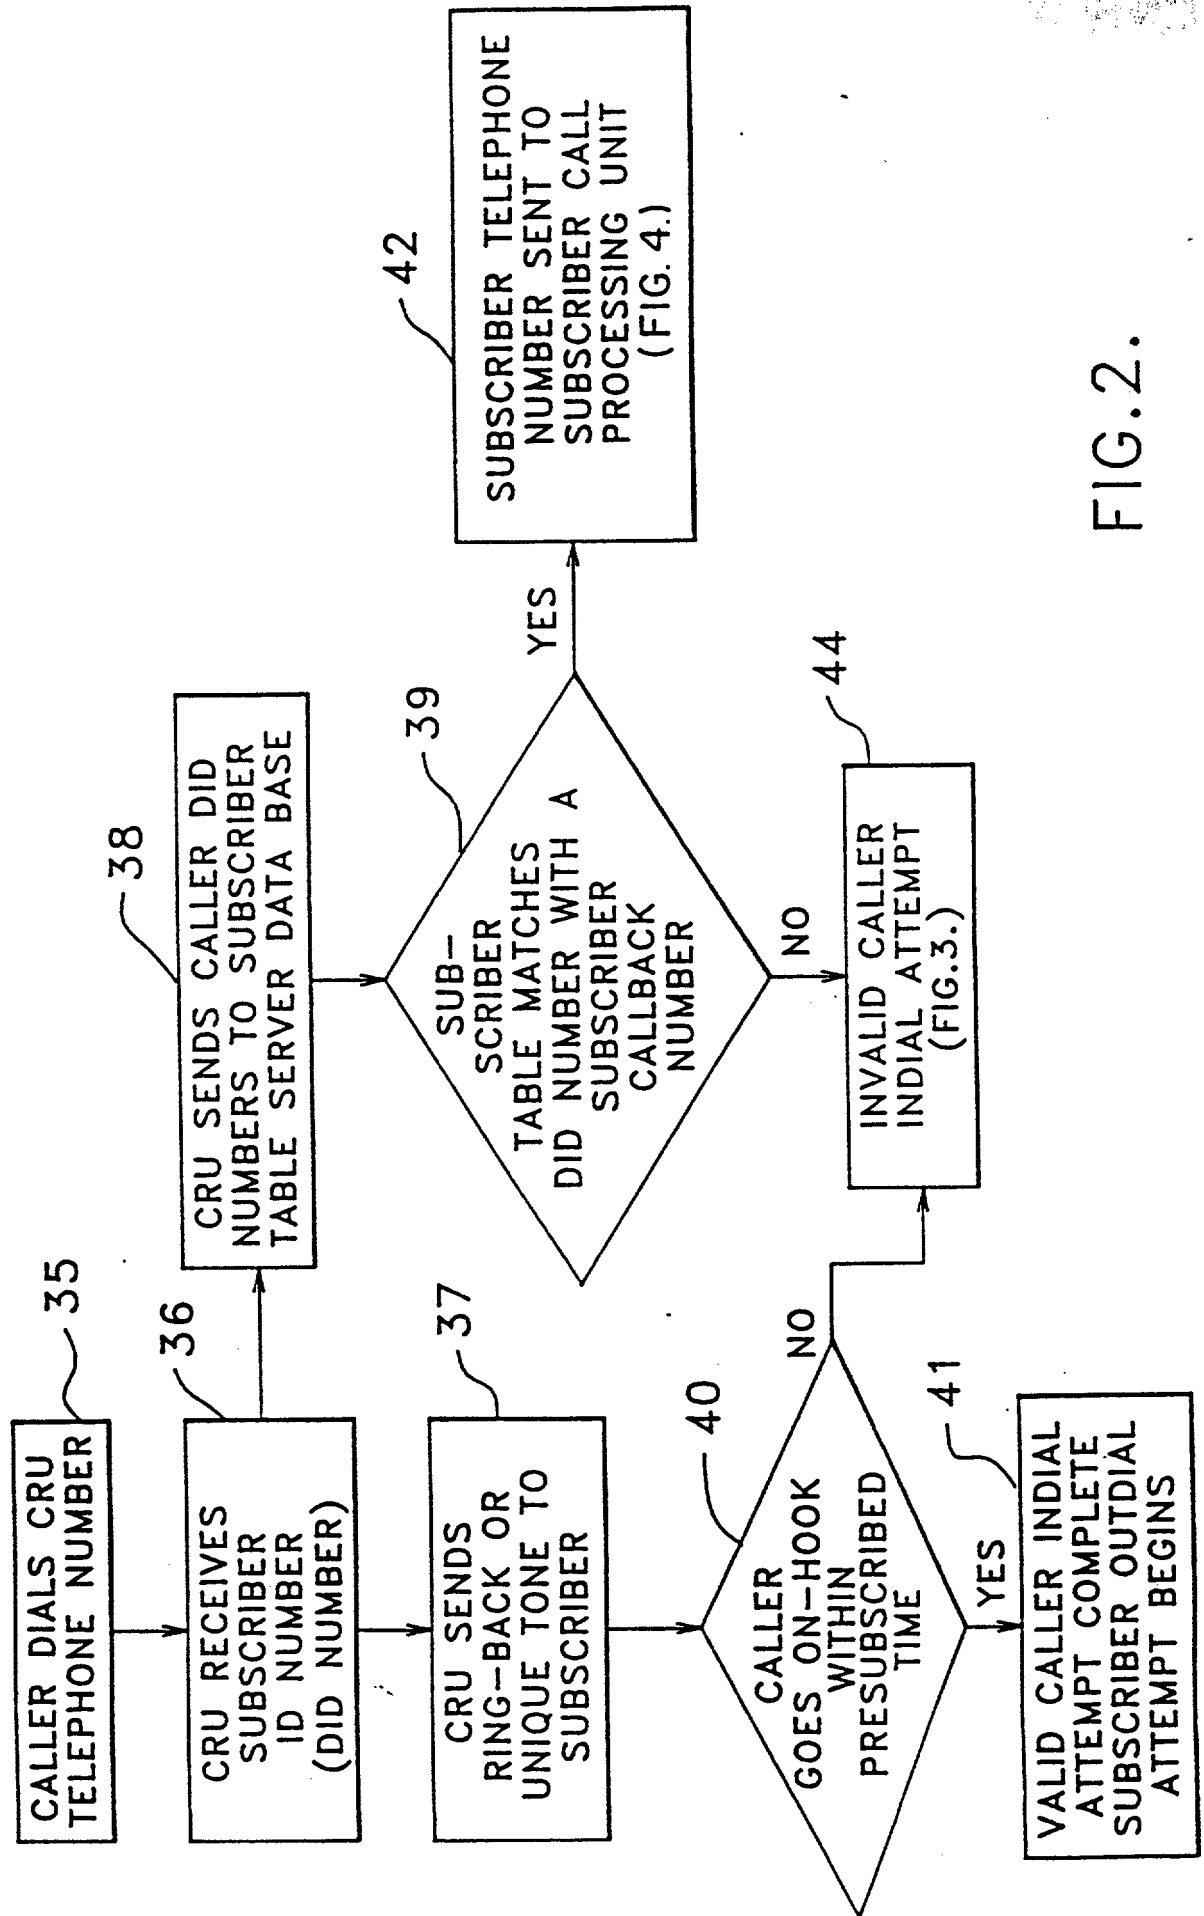


FIG. 2.

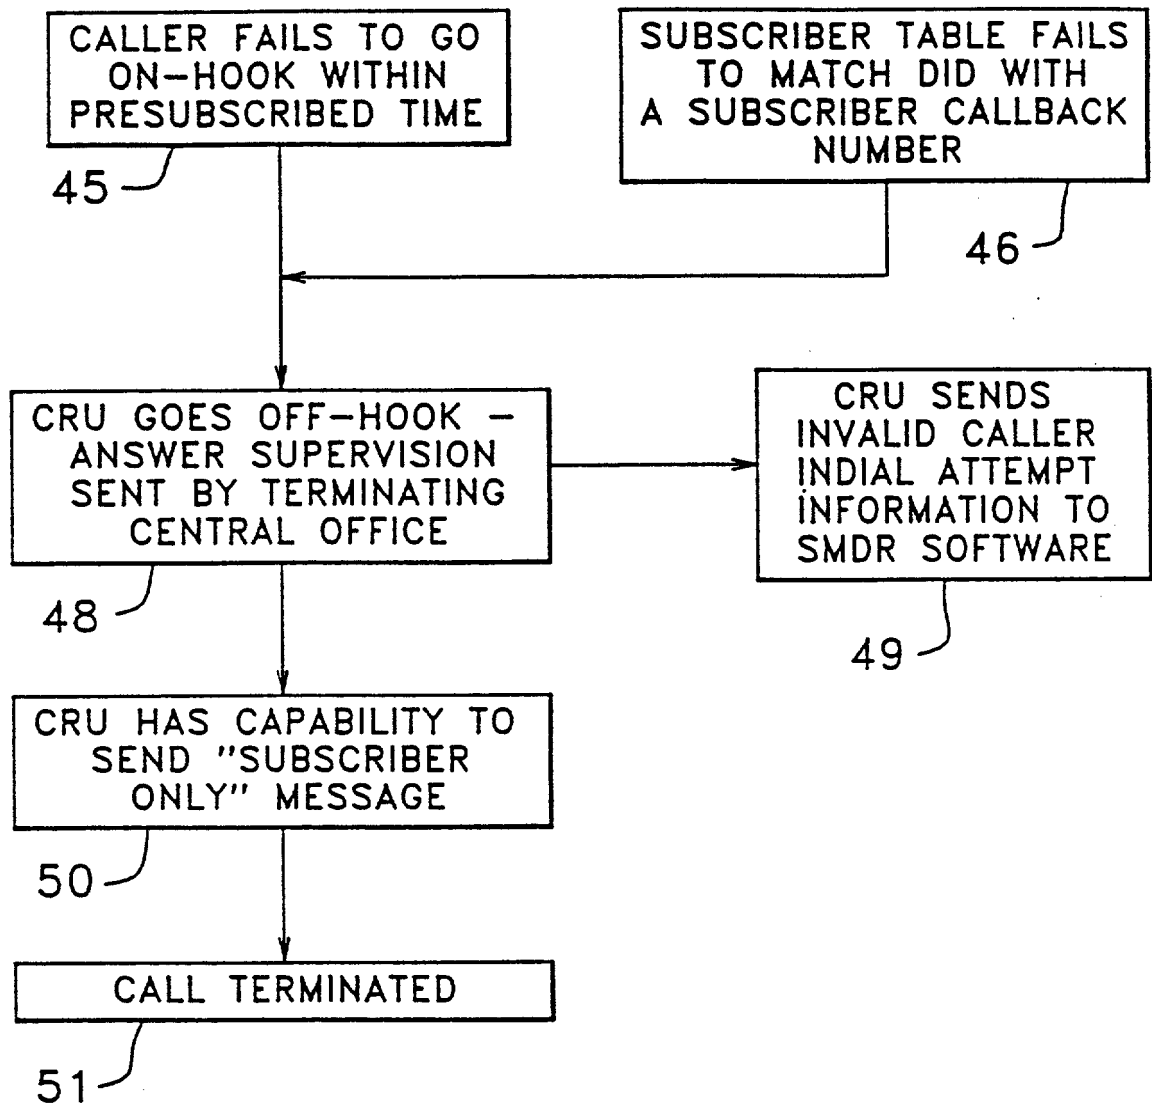


FIG.3.

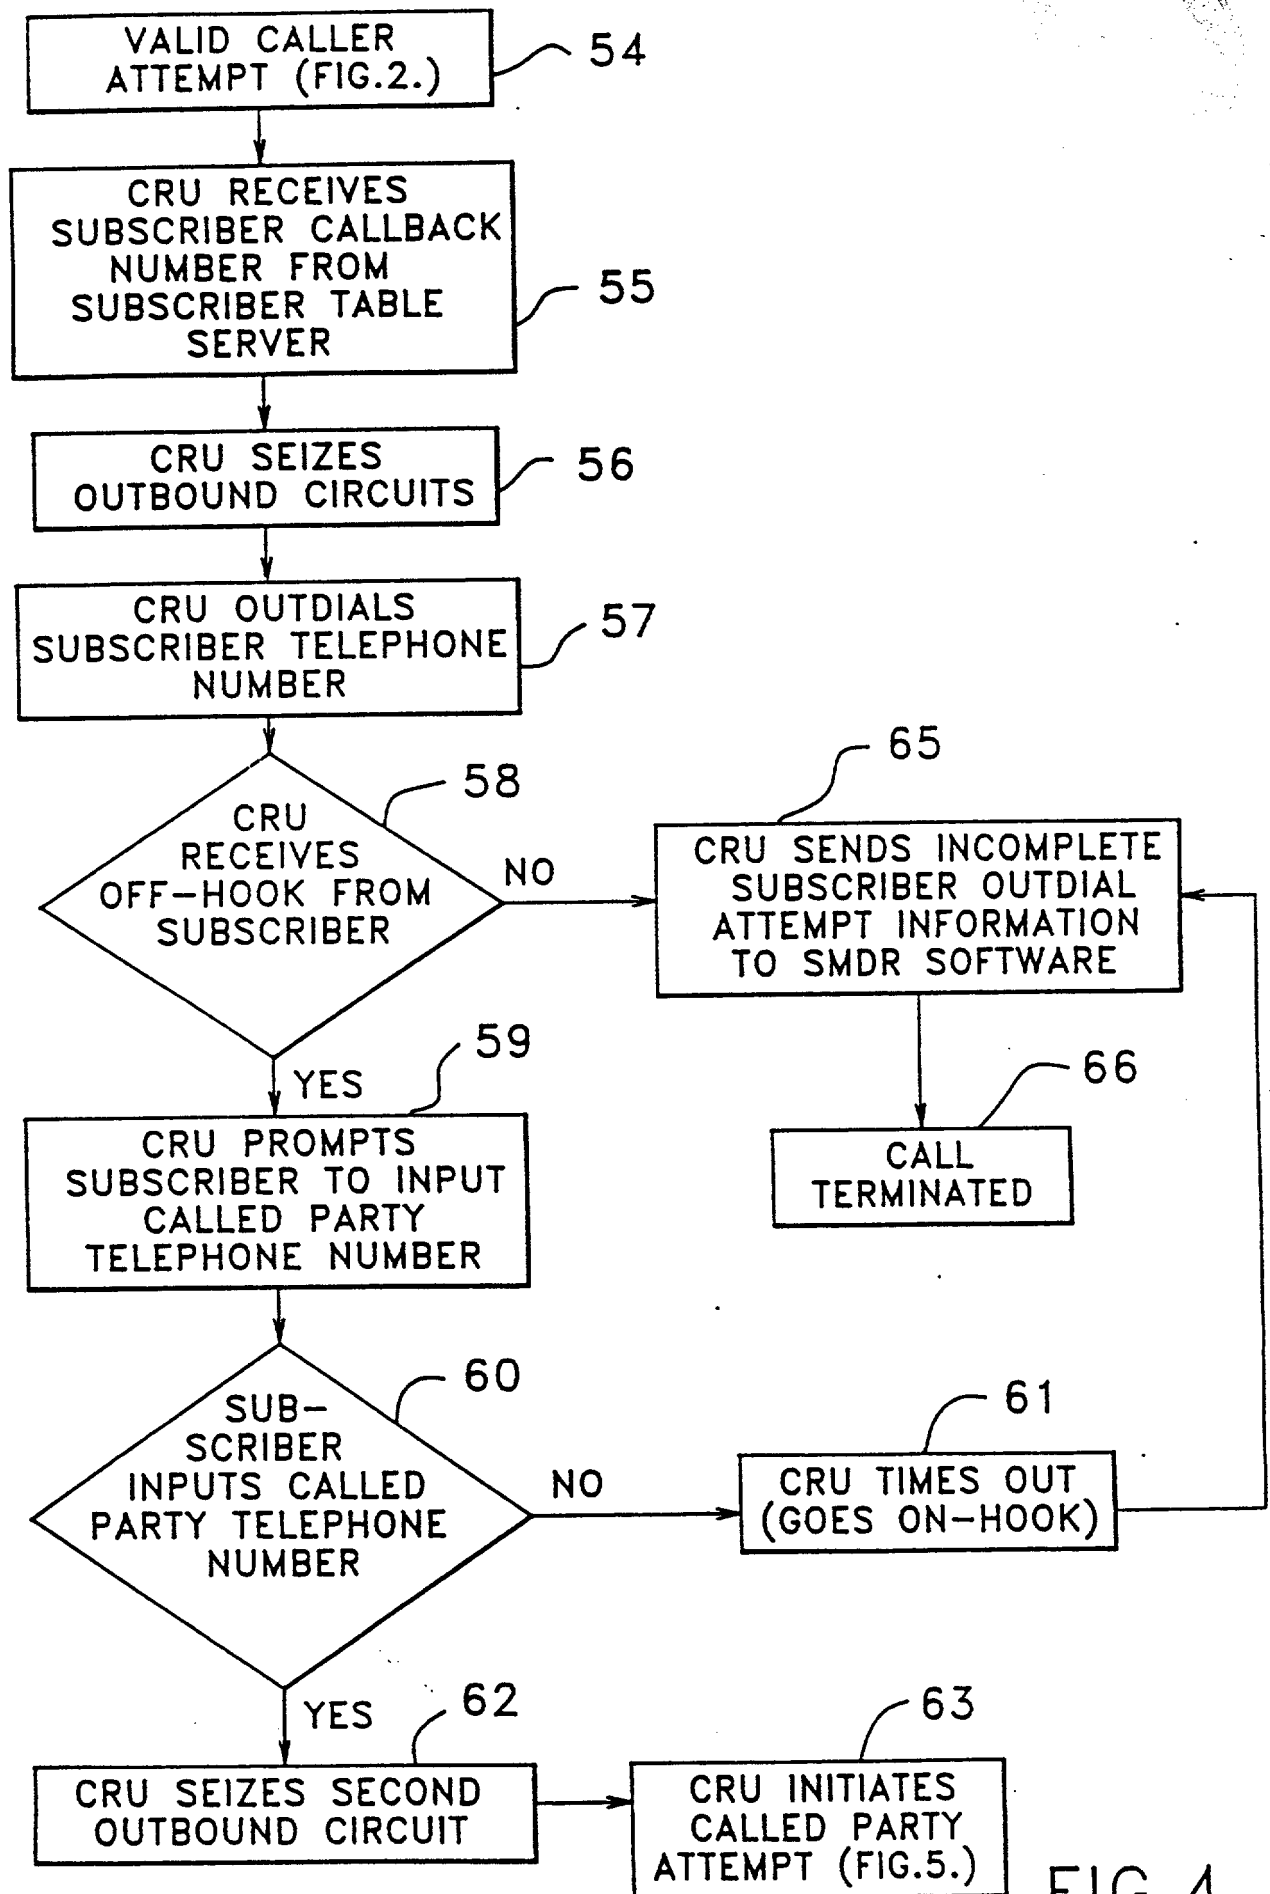


FIG.4.

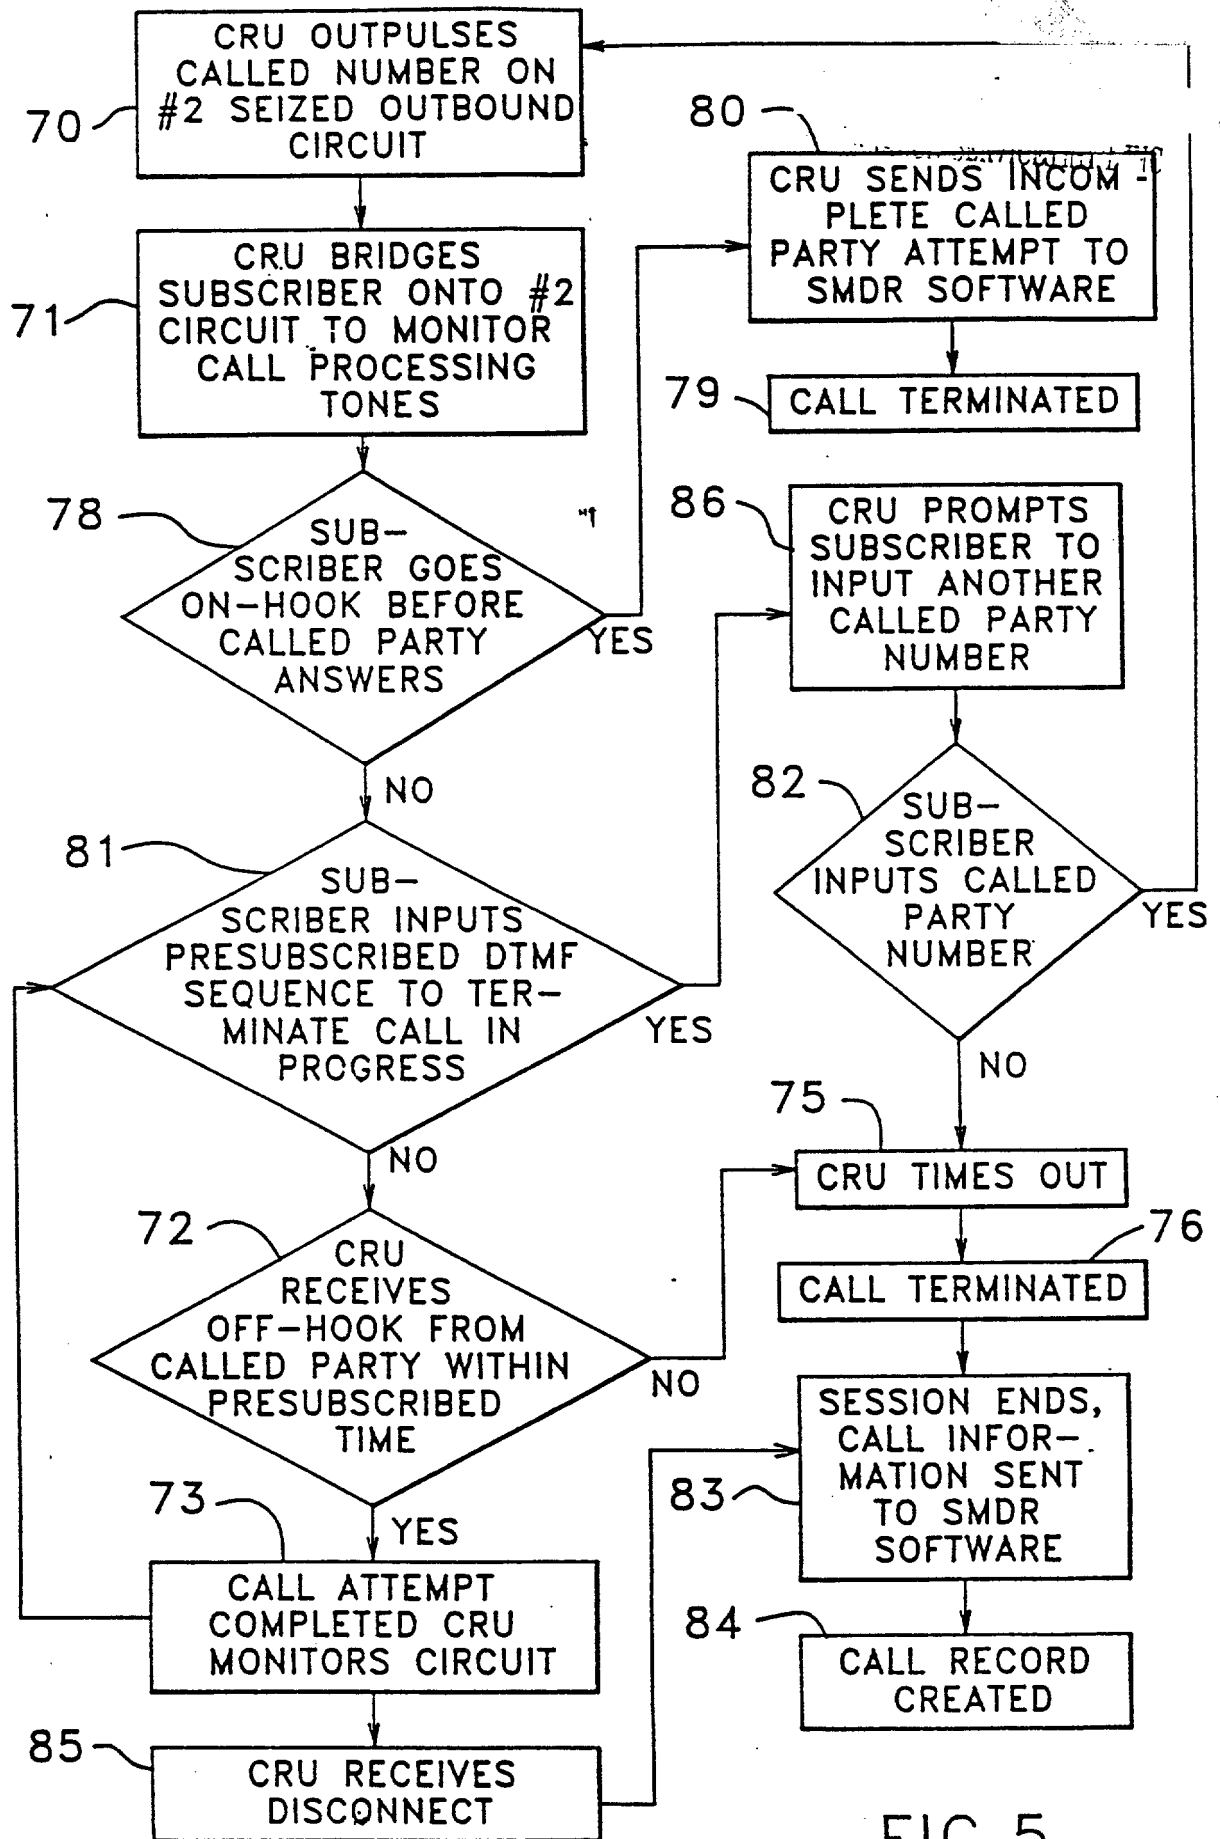


FIG.5.

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled INTERACTIVE TELEPHONE SYSTEM FOR OPTIMIZING SERVICE ECONOMY the specification of which was filed in the U.S. Patent and Trademark Office on April 24, 1992, Serial Number 07/873,323.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulation, 1.56(a).

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Name EARL C. HANCOCK  
HOMER L. KNEARL


Reg. no. 19,472  
Reg. no. 21,197

Address all telephone calls to EARL C. HANCOCK  
at (303)447-2060

Address all correspondence to 3445 Penrose Place, Ste. 210  
Boulder, Colorado 80301

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole inventor JAMES HARRY ALLEMAN

Inventor's signature 

Date May 22 1992 Citizenship U.S.A.

Residence 355 Pearl Street  
BOULDER, COLORADO 80302 CO

Post Office Address

Same As Residence

CO1P49

06798415 021297

PATENT



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

James H. Alleman  
08/252,984  
June 2, 1994  
Title:  
INTERACTIVE TELEPHONE SYSTEM FOR OPTIMIZING SERVICE  
ECONOMY

Examiner: A. Matar  
Group Art Unit: 2601  
Docket: 162.002US1

APPOINTMENT OF ASSOCIATE REPRESENTATIVE

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The undersigned attorney of record in the above-identified patent application hereby  
appoints:

John P. Sutton, Registration No. 22,430  
BRYAN HINSHAW COHEN & BARNET  
425 California Street, Suite 900  
San Francisco, California 94104 (415) 296-0800

to act as an associate attorney, and empowers the associate attorney to receive all correspondence  
from the U. S. Patent and Trademark Office, to amend the specification and drawings, to  
prosecute the application; and ratifies any act done by the associate in respect of the application.

Respectfully submitted,

By Applicants' Representatives,

SCHWEGMAN, LUNDBERG,  
WOESSNER & KLUTH, P.A.  
P.O. Box 2938  
Minneapolis, MN 55402  
(612) 339-0331

Date: Dec. 19, 1996

By: Daniel J. Kluth  
Daniel J. Kluth  
Reg. No. 32,146

62120" ST 85/230